

# Voda Gooseneck Minimal Pullout Sink Mixer - Cold Start




|                              |   |
|------------------------------|---|
| PRODUCT CODE                 | <b>VSS13BG</b>  |
| COLOUR/FINISHES              | <b>Brushed Gunmetal (PVD)</b><br>Chrome<br>Matte Black<br>Brushed Brass (PVD)   |
| FEATURES                     | ColdStart Technology<br>Lead-free 304 Stainless Steel Construction<br>Multifunction Pull-out handpiece<br>Quick-fit hose connection<br>Swivel spout |
| PRESSURE TYPE                | Mains Pressure only   |
| MINIMUM PRESSURE             | 150kPa  |
| MAXIMUM PRESSURE             | 500kPa (As per NZ Building Code AS/NZ 3500.1)   |
| WELS RATING - MAINS PRESSURE | 4 Star (6L/min)   |
| CARTRIDGE/HEADWORKS          | European Ceramic Cartridge  |
| MAXIMUM TEMPERATURE          | 65°C  |
| PLUMBING CONNECTION          | 15mm  |
| SPOUT REACH                  | 220mm   |
| PULLOUT HOSE LENGTH          | +300mm  |
| BENCH HOLE SIZE              | 35mm  |

Voda Plumbingware products are in full compliance with the requirements as set out in the New Zealand Building Code:

[www.vodaplumbingware.co.nz/building-code-clauses/](http://www.vodaplumbingware.co.nz/building-code-clauses/)

This product is not subject to a warning or ban under section 26 of the Building Act 2004.

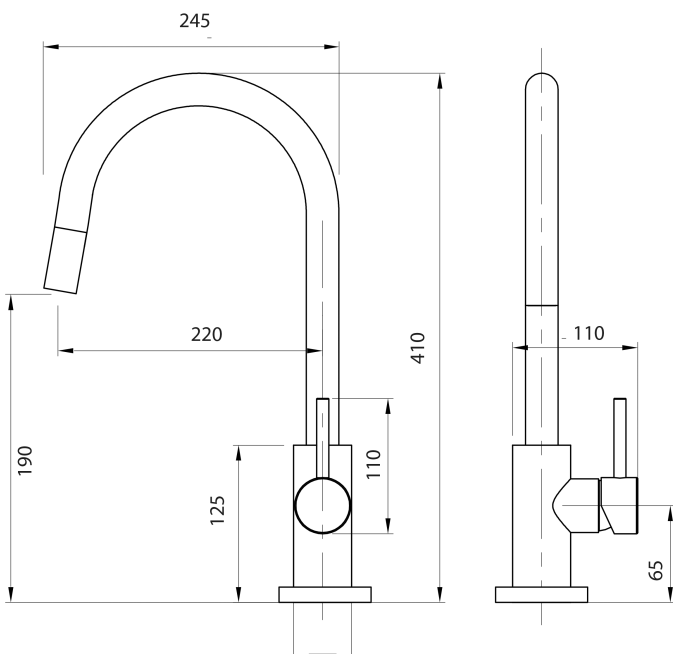

Specifications and dimensions correct at time of publication however are subject to change without notice.

Please refer to physical product prior to installation.

Installation instructions for this product are available from the product page on [vodaplumbingware.co.nz](http://vodaplumbingware.co.nz)